


UNIVERSAL TESTER CT 2.5 KN

84-02

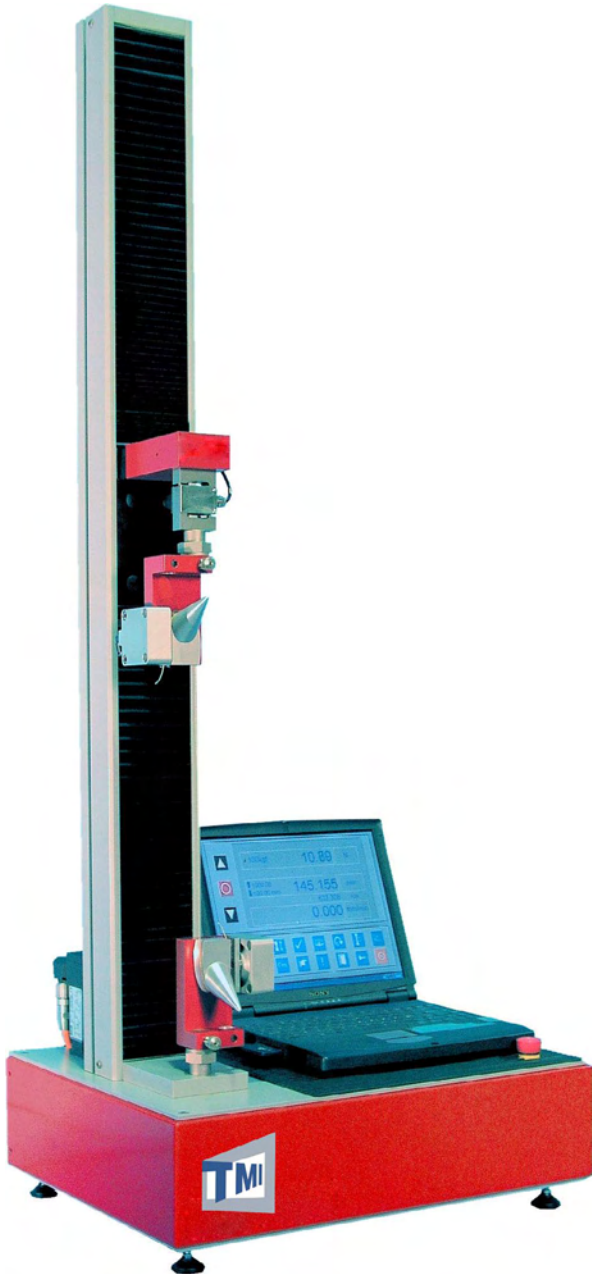

Model CT provides serial port connection to any standard PC.

The 2.5kN is a single-column, Universal tester. In stand-alone mode the machine can be programmed with up to 100 different test methods ranging from the most basic to the most sophisticated machine control, all with full graphics and statistical display. It is the ideal solution to testing problems where there is a need for precise, efficient and consistent performance.

Applications in Plastics, Cord, Textiles, Food, Rubber, Nonwovens, Packaging, Adhesives, Wire, Wood Products and Composites.

Machine Features

- For use with your own laptop
- Fully digital testing system with high precision control and accuracy, includes automated computer control of test methods giving simplicity of operation.
- High resolution auto ranging load cells with accuracies better than +/-0.5% down to 1/1000th of the load cell capacity.
- Automatic recognition and calibration of load cells and extensometers, with instant calibration check facility.
- 800% overload capability of load cells without damage.
- Small footprint design, giving economy of bench and floor space.
- High efficiency pre-loaded self cleaning ballscrews for fast, quiet testing. Fitted with sealed for life lubricated end bearings.
- Crosshead guidance system providing precise alignment and smooth running.
- Precision crosshead control via digital AC servo drive and brushless servo motor giving maintenance free operation and 4,000,000 steps per revolution positional control.
- High speed data collection systems for up to 4 synchronous channels.
- 6 I/O channels for additional devices such as extensometers, micrometers, callipers, balances etc.
- High stiffness loading frames with solid specialised steel crossheads and rigid extruded support columns with T-slots for accessory mounting.
- Overload, overtravel and impact protection.
- Telescopic covers giving additional protection for ballscrews against dust and testing debris.
- Extensive range of grips and fixtures for tension, compression, flexural, shear, peel and product testing etc.
- A wide range of contacting and non-contacting extensometers is available including laser and video models.

winTest™ Analysis

Powerful Software

winTest™ Analysis universal testing software is a multi-functional and fully customizable software package that supports all industry standards including ISO, ASTM and BS EN specifications. Test specifications supported include tensile, compression, flexural, peel, tear, burst, adhesion, shear, cyclic and hardness. Additional flexibility is provided by user-defined multistage step testing for highly specialised testing requirements.



Easy to Use Touch Screen


The on screen control panel allows the operator full control of all tester functions and the ability to conduct manual tests. It give easy access directly to stored test methods and many other functions. Interactive touch screen facility is available on AT models.

Enhanced Graphics

Multiple result/graphs test sheets.
Graphs with zoom facility.
Real-time graphs.
Test results using industry standard calculations.
Gradients or critical sections of graphs with movable marker.

Develop Your Own Methods

User defined machine control routines.
Customized test calculations
Auto scaling graphical displays.
Comprehensive print outs
Interface with peripheral equipment.
Graphs with configurative axes, best fit

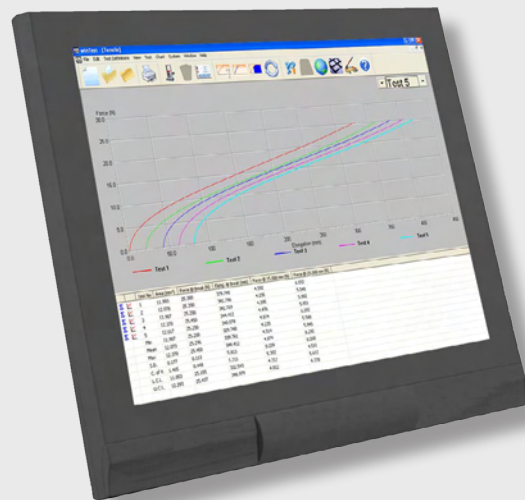

Touch Screen Available on AT models




Additional Features

- Pre-defined industry standard test methods available.
- Ability to create and store unlimited number of additional test methods.
- Comprehensive stored library of industry standards calculations.
- Graphical representation of all stored calculations.
- Retrospective analysis of all test calculations.
- Selectable pass fail criteria for all calculations.
- Upper and lower limits cursors displayed on graph screen.
- Multi-lingual support with one key press.
- Support for a wide range of peripherals including balances, extensometers, thickness measurement devices, temperature chambers etc.
- Operates under Windows 98™ se, NT, 2000, XP

Analyze your data your way

Copy your results into Microsoft™ Word to produce your own presentation-quality test reports. Output your data in CSV format for importing into spreadsheets including Microsoft Excel and standard 'off-the-shelf' SPC packages and Laboratory Manager software. Convert your results into Microsoft™ Access database format. Additional modules are also available that will filter test data to produce long term statistical data that can be used for creating SPC charts for detailed trend analysis Operates under Windows™ 98 se, NT, 2000, XP

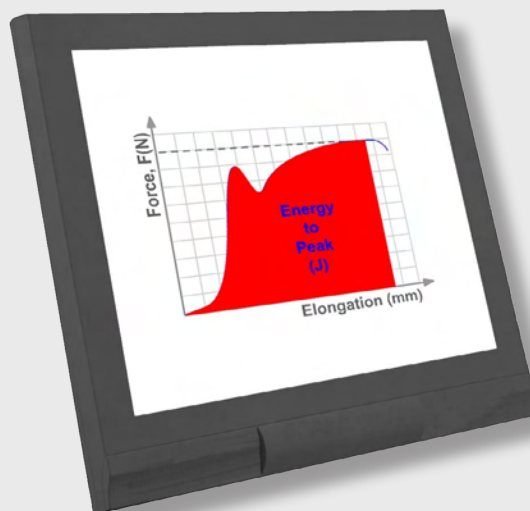

Hardware requirements

- Minimum System
 Windows 98™ Second Edition
 1GHz Processor
 128 MB RAM
 250 MB hard disk space. This is only to install the software, the program also requires hard disk space to store data, this should also be taken into consideration.
 Both computer and monitor must be capable of displaying a resolution of 1024 x 768.
 CD-ROM drive for installation.
 1 x Free serial port

Touch Screen Available on AT models

SPECIFICATIONS

Model CT	84-02-02-0009		
Range kN	2.5	Max speed at full load	1000 mm/min
Power kW	0.3	Weight kg	82kg (181 lbs)
Vertical space mm	1170	Number of Columns	1
Crosshead travel/ resolution mm	1000 by 0.001	PC-Controlled	Windows™ XP Software
Throat mm	200 Ø	Operating temp degree C	-10 ° to +40 °
Frame stiffness	5 kN/mm	Operating humidity	+10 to +90% non-condensing
Speed range	0.001 to 1000 mm/min	Machine Configuration	Table top, base cabinet available
Speed Accuracy	+/- 0.1% under stable conditions.	Data Sampling rate	Maximum 12kHz with up to 200Hz data frames
Crosshead Guidance	Linear slides integral within column	Overall dimensions W x D x H	590 mm x 450 mm x 1475 mm 23 in x 18 in x 58 in
Max force at full speed	2.5 kN	Electrical supply	Dual input selectable 115 or 230V, 1ph 50/60Hz.
Accuracy:	+/- 0.5% of reading down to 1/1000th of load cell capacity.		
Available load cells:	5N, 10N, 20N, 100N, 250N, 500N. 1kN, 2.5kN Maximum of four load cells up to capacity of machine.		

Force Measurement

Universally Calibrated, better than Grade 0.5 EN 7500-1, DIN 51221 ASTM E-4. AFNOR A03-501. Range 0.4% to 100% minimum. Automatic identification of load cell. Resolution 1 part in 500000 with autoranging. Electronic load cell protection.

Extension Measurement

Full frame length to 0.001mm. Resolution 0.001 min. Accuracy 0.01mm. Absolute, relative and auxiliary modes mm, inch and percent. Programmable extension limits.

Speed Control

Drive system temperature and current protection. Positional jog speed 0.001mm/min to maximum. Speed setting increments 0.001mm/min.

Load Frame

Rigid frame, using dual slide crosshead guidance system and rigid extruded support column. Frame stiffness 5kN/mm plus K factor facility built-in. Re-circulating ball screw with bellows. Electronic limit trips, total travel trips and customer programmable safety stops. Rubber mat front protection.

Software

Comprehensive winTest™ Analysis universal windows software covering tensile, compression, peel, shear, tear, cyclic, creep and multi stage testing. It includes a wide range of industry standard test methods and facility to create and store an unlimited number of further test methods. There is automated storage of all test data and ease of export to other software packages such as word, excel, access and SPC systems for enhanced report generation. winTest™ Reports is an enhancement to winTest Analysis to add flexibility to data analysis and statistical reporting. The package provides a report generation capability that can include long-term statistics and control charts for all specified calculations. winTest Reports™ can also be configured to display headings, titles, company logos, graphs, charts, pop-up menus and specific technical information.

Options

In addition to standard fixtures we can test your specimens in our applications laboratory and design special grips and fixtures for custom applications. Models are available with extended frames and wider throat.

Main Headquarters

Testing Machines Inc.
40 McCullough Drive
New Castle, DE 19720
Tel: (302) 613-5600
Fax: (302) 613-5619
Info@testingmachines.com

Büchel BV
t/a Messmer Büchel
Fokkerstrat 24, 3905 KV
Veenendaal, Netherlands
Tel: +31 (0)318 521500
Fax: +31 (0)318 540358

Lako Tool and Manufacturing Inc.
7400 Ponderosa Road
Perrysburg, Ohio 43552
Tel: (419) 662-5256
Fax: (419) 662-8225

Lawson Hemphill
1658 G A R Highway
Swansea, MA 02777 USA
Tel: (508) 679-5364
Fax: (508) 679-5396
Information@lawsonhemphill.com

Adamel Lhomargy SARL
Z.A. de l'Habitat, Bâtiment
6 Route d'Ozoir, 77680
Roissy en Brie, France
Tel: +33 (0) 1 64402910
Fax: +33 (0) 1 64402911

TMI Canada
40 McCullough Drive
New Castle, DE 19720
Tel: (302) 613-5600
Fax: (302) 613-5619
canada@testingmachines.com



www.testingmachines.com

www.lakotool.com

www.lawsonhemphill.com